

MI DRG. NO.

TF800BB14-061A


REV.

TF800BB14-061 A

HIGH POWER BeO TERMINATION

CAUTION


THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

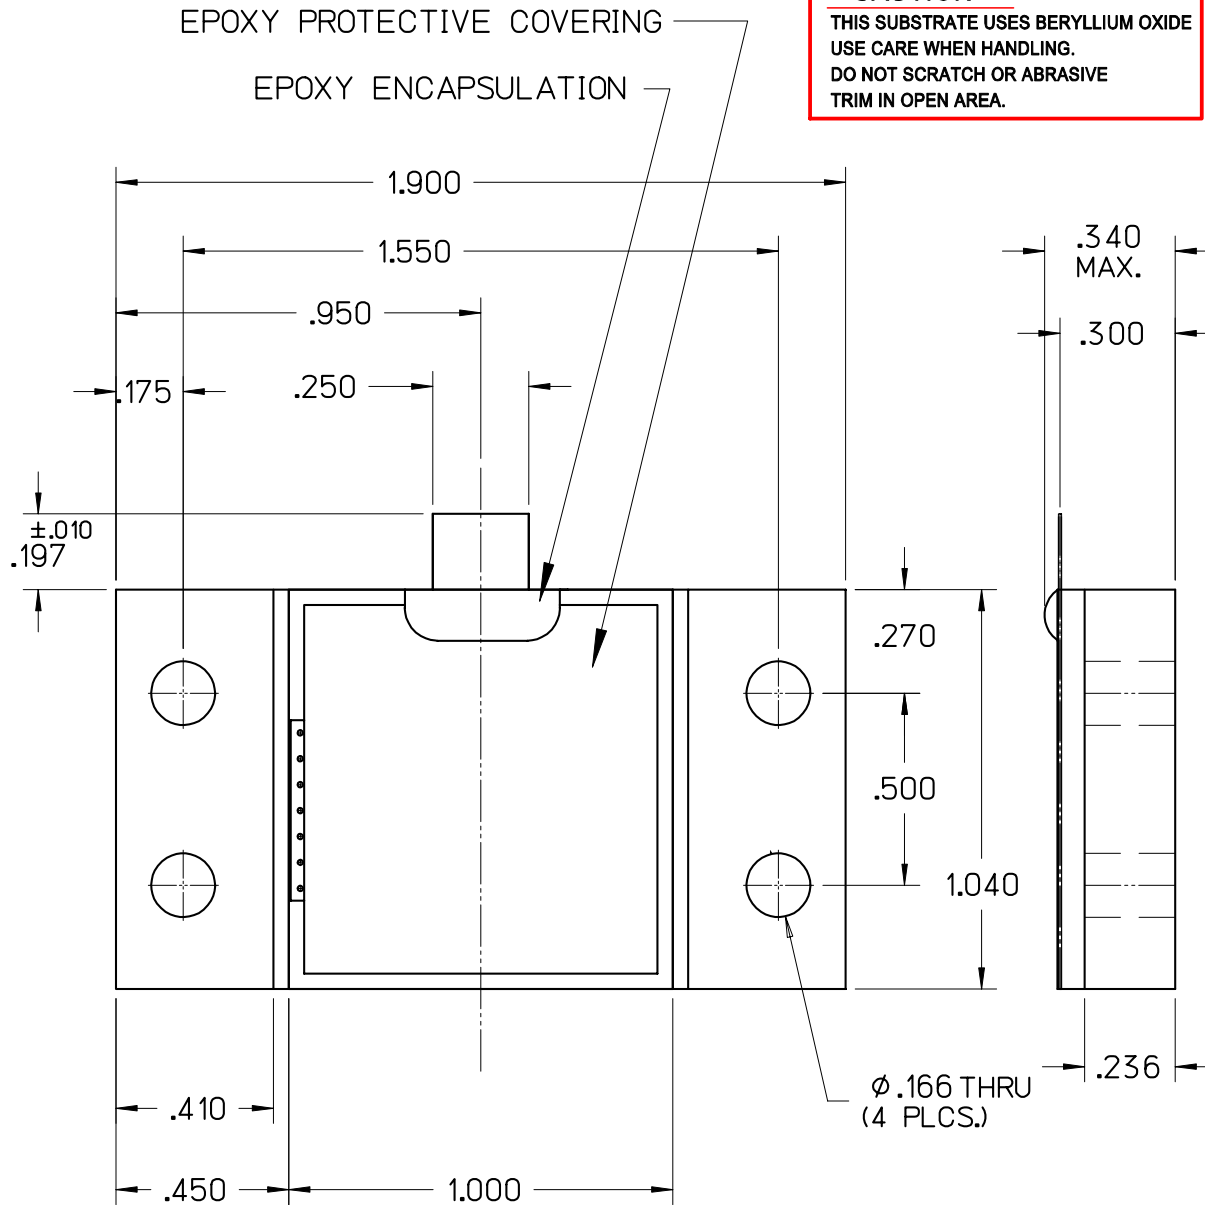

SPECIFICATIONS | FILE: TERMOUT

POWER MAX (WATTS):	800 CW
RESISTANCE	50 OHMS (±5%)
FREQUENCY	VSWR
UP TO 860 MHz	1.065:1
1450-1500 MHz	1.22:1

POWER DERATING

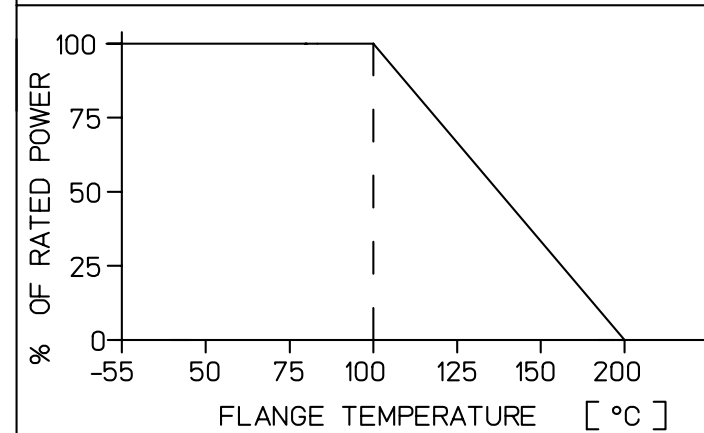

A	12/15/08	MLD	-	-	000742
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	MAI	MAI	2" = 1"
DATE	DATE	DATE	.XX ± .015
12/15/08	01/05/09	01/05/09	.XXX ± .010



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL